

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
19 August 2004 (19.08.2004)


PCT

(10) International Publication Number
WO 2004/069012 A1

- (51) International Patent Classification⁷: **A47J 31/40**
- (21) International Application Number:
PCT/EP2003/011643
- (22) International Filing Date: 21 October 2003 (21.10.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
MI2003A000219 7 February 2003 (07.02.2003) IT
- (71) Applicant (for all designated States except US): **DE' LONGHI S.P.A.** [IT/IT]; Via L. Seitz, 47, I-31100 Treviso (IT).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **DE' LONGHI** Giuseppe [IT/IT]; Vicolo Rovero, 1, I-31100 Treviso (IT).
- (74) Agent: **AVV. RAPISARDI MARIACRISTINA**; Ufficio Brevetti Rapisardi S.r.l., Via Serbelloni, 12, I-20122 Milano (IT).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: MACHINE FOR COFFEE BEVERAGE PRODUCTION

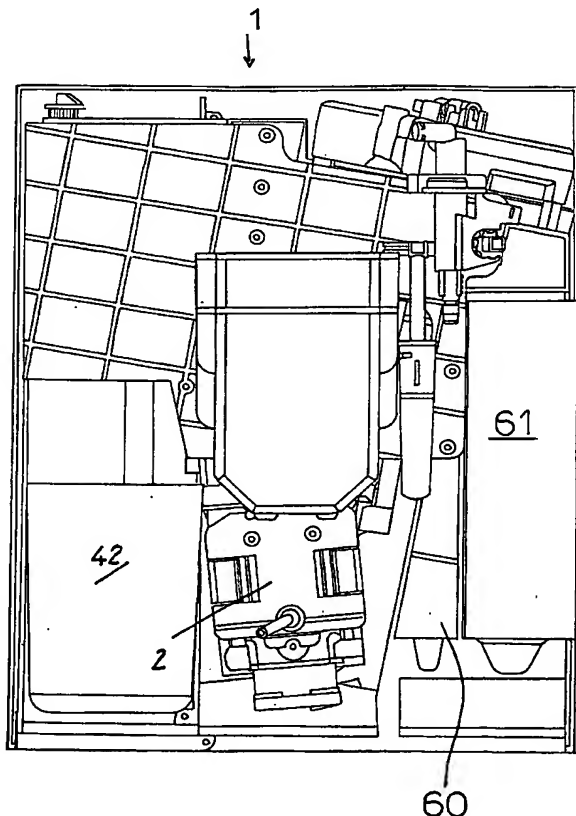

(57) Abstract: The machine for producing coffee beverages comprises a device to contain coffee powder and another device to supply a fluid to produce the coffee beverage, both devices being reciprocally mobile so that when connected together they form a coffee powder infusion chamber. The container device connected to the machine is removable. The machine comprises an interception tap for water or liquid in the form of a hollow body having at least a first and second communicating space with the exterior and equipped with a piston connected in sliding mode to the internal part, forming together with said body at least four chambers inside which steam or liquid can be passed alternatively. The fluid supply device is connected to the boiler so that it is heated by the heat dispersed from the boiler.